DIHR

we mean clean

DIHR
we mean clean

INDEX

UNDER-COUNTER DISHWASHERS

CS	Robust and essential glass & dishwashers	1
GS	Glass & dishwashers with double-wall door	2
DS	Double skin glass & dishwashers	3
ELECTRON	High-tech double skin glass & dishwashers	4
BOTTLE COMBI ELECTRON PLUS	High-tech double skin bottlewasher	4
OPTIMA	Glass and dishwashers with clean water technology	5

HOOD-TYPE DISHWASHERS

HT 10	Robust and essential hood-type dishwashers	6
HT 11	Single skin hood-type dishwashers	7
HT 11 I	Insulated hood-type dishwashers	7
HT 12 ELECTRON	Latest generation hood-type dishwashers	8
HT 12 MAXXI PLUS H+	Multipurpose hood-type dishwasher	8
HT 14 OPTIMA	Connected hood-type dishwashers with clean water technology	9

RACK-TYPE DISHWASHERS

RX COMPACT	Compact rack-type dishwashers with simple rinse	10
RX EVO	Rack-type dishwashers with double rinse	11
RX PRO	Rack-type dishwashers with reinforced double rinse	12
RX OPTIMA	Rack-type dishwashers with 3R+ reinforced triple rinse	13

FLIGHT-TYPE DISHWASHERS

QX PRO	Flight-type dishwashers with reinforced double rinse	14
QX OPTIMA	Flight-type dishwashers with 3R+ reinforced triple rinse	15

TUNNEL TRAY WASHER & TRANSPORTATION SYSTEMS

TX	Tunnel traywasher with dryer	16
TS	Transportation systems	16

WAREWASHERS

LP	Warewashers	17 - 18

HIGH-PRESSURE UTENSIL WASHER

HYDROPOWER	Combi high-pressure utensil and dishwasher	19
GRANULES	Granule warewashers	20

PULL-THROUGH CRATE WASHERS

VX - VX PRO	Pull-through crate washers	21

CONVEYOR CRATE WASHERS

LX - LX-HD	Conveyor crate washers	22

BASKETS INCLUDED

	Standard supplied baskets	23

TERMS

	General sales conditions	24

UNDER-COUNTER DISHWASHERS

CS

ROBUST AND ESSENTIAL
GLASS & DISHWASHERS

SOUND AND HEAT PROOF DOUBLE-SKIN DOOR

ELECTRONIC VERSION AVAILABLE

LIGHT WASH AND RINSE ARMS: GRANTING THE BEST EFFICIENCY ALSO WHEN THE WATER PRESSURE IS WEAKER

SELF-CLEANING CYCLE ON THE ELECTRONIC VERSIONS

	H	Ø	mm	pcs/h	W/D/H mm
CS 35	195	-	350x350	30	400x495x585
CS 40	305	295	400x400	30	450x535x700
CS 40 LS	305	295	400x400	30	450x535x700
CS 50	320	345	500x500	30	590x600x850
CS 35 L	195	-	350x350	38	400x495x595
CS 40 L	305	295	400x400	31	450x535x710
CS 40 LS L	305	295	400x400	31	450x535x710
CS 50 L	320	345	500x500	29	590x600x850

GS

GLASS & DISHWASHERS
WITH DOUBLE-WALL DOOR

SOFT START
WASH PUMP FOR
FRAGILE CROCKERY
("T"MODELS)

SILENCE AND
FIABILITY

ELECTRONIC
VERSION AVAILABLE

LOWERED
HEIGHT

CUSTOMIZABLE

	H	Ø	mm	pcs/h	W/D/H mm
GS 35	195	-	350x350	30	400x495x585
GS 37	275	-	370x370	30	420x490x650
GS 37 LS	275	280	370x370	30	420x490x650
GS 40	305	-	400x400	30	450x535x700
GS 40 LS	305	295	400x400	30	450x535x700
GS 50 N	320	345	500x500	30	590x600x820
GS 50 ECO	320	345	500x500	30	590x600x850
GS 50^{U}	320	345	500x500	30	590x600x850
GS 40 T	305	-	400x400	60	450x535x700
GS 40 T LS	305	295	400x400	60	450x535x700
GS 50 N T	320	345	500x500	45	590x600x820
GS 50 T	320	345	500x500	60	590x600x850
GS 85 T	355	380	500x500	60	590x600x1290

U: Construction according to UL-NSF standards upon request

DS

DOUBLE SKIN
GLASS & DISHWASHERS

THERMOLABEL MODEL

SOFT START WASH PUMP FOR FRAGILE CROCKERY ("T"MODELS)

RELIABLE AND **QUIET**

ELECTROMECHANICAL VERSION AVAILABLE

CUSTOMIZABLE

S/S WASH ARMS (DS 50 - DS 50 T - DS 50 TT)

	H	Ø	mm	pcs/h	W/D/H mm
DS 40	305	295	400x400	30	460x545x715
DS 50 U	310	325	500x500	30	595x610x845
DS 40 T	305	295	400x400	60	460x545x715
DS 50 T	310	325	500x500	60	595x610x845
DS 50 TT	310	325	500x500	22	595x610x845

Thermolabel compliance: an internationally recognized method for ensuring high hygiene standards in dishwashers, in accordance with HACCP standards. It certifies that the machine reaches a temperature of at least 71°C for a preset minimum period of time.

U: Construction according to UL-NSF standards upon request

ELECTRON

HIGH-TECH DOUBLE SKIN GLASS & DISHWASHERS

PLUS SYSTEM

PROGRAMMABLE CYCLES

CONNECTIVITY
WHEREVER YOU ARE... YOUR DISHWASHER, JUST A CLICK AWAY

SOFT START WASH PUMP FOR FRAGILE CROCKERY

DOUBLE SKIN AISI 304 MACHINE AND DOUBLE SKIN **INSULATED DOOR**

BOTTLE WASHER

	H	Ø	mm	pcs/h	tray*	W/D/H mm
ELECTRON 400	310	310	400x400	60	-	460x550x780
ELECTRON 500	325	340	500x500	60	GN 1/1	600x610x850
ELECTRON 500 H+	325	340	500x500	43	GN 1/1	600x610x850
ELECTRON 600	400	400	500x500	53	600x400x25 GN 1/1	600x680x850
ELECTRON 400 PLUS	310	310	400x400	60	-	460x550x780
ELECTRON 400 HR PLUS	310	310	400x400	28	-	460x550x780
ELECTRON 500 PLUS H+	325	340	500x500	60	GN 1/1	600x610x850
ELECTRON 500 HR PLUS H+	325	340	500x500	34	GN 1/1	600x610x850
ELECTRON 1000 PLUS	440	450	500x500	60	600x400x25 GN 1/1	600x700x1380

	H	Ø bottle neck	Ø max bottle	pcs/h	W/D/H mm
BOTTLE COMBI ELECTRON PLUS	325	>16 mm	113 mm	45	600x610x850
BOTTLE COMBI ELECTRON HR PLUS	325	>16 mm	113 mm	20	600x610x850

* Max depth 25 mm with special basket to be ordered.

OPTIMA

GLASS AND DISHWASHERS
WITH CLEAN WATER TECHNOLOGY

PLUS SYSTEM:
STABILIZED RINSE, GUARANTEED TEMPERATURES, CONSUMPTION AND PRESSURE

CONNECTIVITY
WHEREVER YOU ARE... YOUR DISHWASHER, JUST A CLICK AWAY

HYGIENE+
HIGH SANITIZATION LEVELS A_0=60

HEAT RECOVERY HR:
IMMEDIATE SAVINGS

CLEAN WATER SYSTEM

	H	Ø	mm	pcs/h	tray*	W/D/H mm
OPTIMA 400	310	310	400x400	43	-	460x550x780
OPTIMA 400 HR	310	310	400x400	21	-	460x550x780
OPTIMA 500 SMALL	260	260	500x500	42	-	600x610x730
OPTIMA 500 HR SMALL	260	260	500x500	24	-	600x610x730
OPTIMA 500	340	340	500x500	60	GN 1/1	600x610x850
OPTIMA 500 HR	340	340	500x500	28	GN 1/1	600x610x850
OPTIMA 500 H+	340	340	500x500	60	GN 1/1	600x610x850
OPTIMA 500 HR H+	340	340	500x500	28	GN 1/1	600x610x850

* Max depth 25 mm with special basket to be ordered.

HT 10

ROBUST AND ESSENTIAL
HOOD-TYPE DISHWASHERS

AVAILABLE IN **ELECTRONIC** VERSION AND **ELECTROMECHANICS**

SELF-CLEANING CYCLE ON THE ELECTRONIC VERSIONS

INNOVATIVE SYSTEM OF COUPLED WASH AND RINSE ARMS IN POLYPROPYLENE AND FIBER OF GLASS

NEW !

LINEAR OR CORNER LAYOUTS

	Ø	mm	pcs/h	GN 1/1 tray*	W/D/H mm
HT 10	410	500x500	40	GN 1/1	720x735x1445/1880
HT 10 L	410	500x500	46	GN 1/1	720x735x1445/1880

* Max depth 25 mm with special basket to be ordered.

HT 11 (I)

INSULATED
HOOD-TYPE DISHWASHERS

AVAILABLE IN **ELECTRONIC** VERSION AND **ELECTROMECHANICS**

INSULATED HOOD
(HT 11 I)

LIGHT RINSE ARMS:
EFFICIENT EVEN WITH LOW PRESSURE OF THE WATER INLET

	Ø	mm	pcs/h	tray*	W/D/H mm
HT 11 ECO	410	500x500	46	GN 1/1	720x735x1445/1880
HT 11 U	410	500x500	70	GN 1/1	720x735x1445/1880
HT 11 ECO T	410	500x500	72	GN 1/1	720x735x1445/1880
HT 11 T	410	500x500	72	GN 1/1	720x735x1445/1880
HT 11 I	410	500x500	70	GN 1/1	720x735x1445/1880
HT 11 I T	410	500x500	72	GN 1/1	720x735x1445/1880
HT 11 ITT	410	500x500	26	GN 1/1	720x735x1445/1880

Thermolabel compliance: an internationally recognized method for ensuring high hygiene standards in dishwashers, in accordance with HACCP standards. It certifies that the machine reaches a temperature of at least 71°C for a preset minimum period of time.

U: Construction according to UL-NSF standards upon request

* Max depth 25 mm with special basket to be ordered.

HT 12
ELECTRON

LATEST GENERATION
HOOD-TYPE DISHWASHERS

PROGRAMMABLE CYCLES

CONNECTIVITY
WHEREVER YOU ARE...YOUR DISHWASHER, JUST A CLICK AWAY

NEW MODEL MAXXI
MULTI-USE WITH LARGE 600X500 MM BASKET

AUTOMATIC TWO-STEP **HOOD LIFT**

HEAT RECOVERY HR:
IMMEDIATE SAVINGS

	Ø	mm	pcs/h	tray	W/D/H mm
HT 12 ELECTRON	410	500x500	60	GN 1/1*	720x735x1445/1880
HT 12 ELECTRON H+	410	500x500	60	GN 1/1*	720x735x1445/1880
HT 12 ELECTRON LIFT	410	500x500	60	GN 1/1*	720x735x1445/1880
HT 12 ELECTRON LIFT H+	410	500x500	60	GN 1/1*	720x735x1445/1880
HT 12 ELECTRON PLUS H+	410	500x500	72	GN 1/1*	720x735x1445/1880
HT 12 ELECTRON HR PLUS H+	410	500x500	55	GN 1/1*	720x735x2095
HT 12 ELECTRON PLUS LIFT H+	410	500x500	72	GN 1/1*	720x735x1445/1880
HT 12 ELECTRON HR PLUS LIFT H+	410	500x500	55	GN 1/1*	720x735x2095
HT 12 MAXXI PLUS H+	310<Ø <410	600x500	72	GN 1/1 600x400x25*	800x735x1490/1961
HT 12 MAXXI HR PLUS H+	310<Ø <410	600x500	55	GN 1/1 600x400x25*	800x735x2162
HT 12 MAXXI PLUS LIFT H+	310<Ø <410	600x500	72	GN 1/1 600x400x25*	800x735x1490/1961
HT 12 MAXXI HR PLUS LIFT H+	310<Ø <410	600x500	55	GN 1/1 600x400x25*	800x735x2162

* Max depth 25 mm with special basket to be ordered.

HT 14
OPTIMA

CONNECTED HOOD-TYPE DISHWASHERS WITH CLEAN WATER TECHNOLOGY

PLUS SYSTEM: STABILIZED RINSE, GUARANTEED TEMPERATURES, CONSUMPTION AND PRESSURE

CONNECTIVITY WHEREVER YOU ARE... YOUR DISHWASHER, JUST A CLICK AWAY

CLEAN WATER SYSTEM

HYGIENE+ HIGH SANITIZATION LEVELS A_0=60

HEAT RECOVERY HR: IMMEDIATE SAVINGS

AUTOMATIC TWO-STEP **HOOD LIFT**

	Ø	mm	pcs/h	tray*	W/D/H mm
HT 14 OPTIMA	410	500x500	55	GN 1/1	720x735x1445/1880
HT 14 OPTIMA HR	410	500x500	40	GN 1/1	720x735x2095
HT 14 OPTIMA LIFT	410	500x500	55	GN 1/1	720x735x1445/1880
HT 14 OPTIMA HR LIFT	410	500x500	40	GN 1/1	720x735x2095
HT 14 OPTIMA H+	410	500x500	55	GN 1/1	720x735x1445/1880
HT 14 OPTIMA HR H+	410	500x500	40	GN 1/1	720x735x2095
HT 14 OPTIMA LIFT H+	410	500x500	55	GN 1/1	720x735x1445/1880
HT 14 OPTIMA HR LIFT H+	410	500x500	40	GN 1/1	720x735x2095

* Max depth 25 mm with special basket to be ordered.

RX
COMPACT

COMPACT RACK-TYPE DISHWASHERS
WITH SIMPLE RINSE

AVAILABLE IN **ELECTRONIC** VERSION AND **ELECTROMECHANICS**

5 SPEEDS
(ELECTRONIC VERSION)
3 SPEEDS
(ELECTROMECHANICAL)

COMPACT
DIMENSIONS

	Ø	mm	pcs/h	DIN	tray*	W/D/H mm
RX 101	450	500x500	66-100	66	GN 1/1	1080x715x1690/1900
RX 164	450	500x500	86-150	86	GN 1/1	1880x715x1690/1900
RX 101 E^{U}	450	500x500	66-100	66	GN 1/1	1080x715x1565/1900
RX 164 E^{U}	450	500x500	86-150	86	GN 1/1	1880x715x1565/1900

Productivity according to DIN SPEC 10534 regulation (contact time)
U: Construction according to UL-NSF standards upon request
* Max depth 25 mm.

RX EVO

RACK-TYPE DISHWASHERS
WITH DOUBLE RINSE

AVAILABLE IN **ELECTRONIC** VERSION AND **ELECTROMECHANICS**

AISI 316 STAINLESS STEEL TANKS AND BOILERS

ALL-IN-ONE WASH ARMS

	Ø	mm	pcs/h	DIN	tray*	W/D/H mm
RX 104	450	500x500	80-112	80	GN 1/1	1900x805x1830/2120
RX 144	450	500x500	93-144	93	GN 1/1	2100x805x1830/2120
RX 184	450	500x500	115-192	115	GN 1/1	2500x805x1830/2120
RX 184 LC	450	500x500	115-192	-	GN 1/1	2225x985x1830/2120
RX 244	450	500x500	132-240	132	GN 1/1	2800x805x1830/2120
RX 144 E^{U}	450	500x500	80-112	80	GN 1/1	1900x805x1830/2120
RX 144 E	450	500x500	93-144	93	GN 1/1	2100x805x1830/2120
RX 184 E	450	500x500	115-192	115	GN 1/1	2500x805x1830/2120
RX 184 E LC	450	500x500	115-192	-	GN 1/1	2225x985x1830/2120
RX 244 E^{U}	450	500x500	132-240	132	GN 1/1	2800x805x1830/2120

Productivity according to DIN SPEC 10534 regulation (contact time)
U: Construction according to UL-NSF standards upon request
* Max depth 25 mm.

RX PRO

RACK-TYPE DISHWASHERS
WITH REINFORCED
DOUBLE RINSE

CONNECTIVITY
WHEREVER YOU ARE...
YOUR DISHWASHER, JUST
A CLICK AWAY

1-DRAIN
CENTRALIZED DRAIN

AISI 316 STAINLESS STEEL
TANKS AND BOILER

	Ø	mm	pcs/h	DIN	tray*	W/D/H mm
RX 246	450	500x500	100-250	100	GN 1/1	2100x805x1830/2120
RX 296	450	500x500	135-300	135	GN 1/1	2700x805x1830/2120
RX 296 LC	450	500x500	135-300	-	GN 1/1	2425x985x1830/2120
RX 326	450	500x500	150-330	150	GN 1/1	3000x805x1830/2120
RX 356	450	500x500	190-360	190	GN 1/1	3600x805x1830/2120
RX 356 LC	450	500x500	190-360	-	GN 1/1	3325x985x1830/2120
RX 396	450	500x500	210-400	210	GN 1/1	3900x805x1830/2120

Productivity according to DIN SPEC 10534 regulation (contact time)
Steam versions available
* Max depth 25 mm.

RX OPTIMA

RACK-TYPE DISHWASHERS WITH 3R+
REINFORCED TRIPLE RINSE

	Ø	mm	pcs/h	DIN	tray*	W/D/H mm
RX 250	450	500x500	100-250	100	GN 1/1	2250x920x2100/2120
RX 300	450	500x500	135-300	135	GN 1/1	2850x920x2100/2120
RX 300 LC	450	500x500	135-300	-	GN 1/1	2575x985x2100/2120
RX 330	450	500x500	150-330	150	GN 1/1	3150x920x2100/2120
RX 360	450	500x500	190-360	190	GN 1/1	3750x920x2100/2120
RX 360 LC	450	500x500	190-360	-	GN 1/1	3475x985x2100/2120
RX 400	450	500x500	210-400	210	GN 1/1	4050x920x2100/2120

Productivity according to DIN SPEC 10534 regulation (contact time)
* Max depth 25 mm.

QX PRO

FLIGHT-TYPE DISHWASHERS
WITH REINFORCED
DOUBLE RINSE

AWARDED FOR THEIR
HIGH EFFICIENCY: LOWEST
CONSUMPTION LEVELS IN
OUR SECTOR

CONNECTIVITY
WHEREVER YOU ARE...YOUR DISHWASHER,
JUST A CLICK AWAY

1-DRAIN
CENTRALIZED AND
AUTOMATIZED DRAIN

ECO-FRIENDLY
MORE RESPECT FOR THE
ENVIRONMENT

	H	pcs/h	DIN	710 mm wide conveyor	W/D/H mm
QX 246	450	1950/3690	2400	710	4500x985x1860/2200
QX 376	450	2400/4050	3300	710	5100x985x1860/2200
QX 416	450	3000/4800	3750	710	5400x985x1860/2200
QX 536U	450	4200/6450	4650	710	6000x985x1860/2200
QX 596	450	4350/6750	5100	710	6300x985x1860/2200
QX 676	450	5250/8100	6000	710	7300x985x1860/2200
QX 776	450	5850/9000	6450	710	7600x985x1860/2200

Productivity according to DIN SPEC 10534 regulation (contact time)
Steam versions available Steam versions available
U: Construction according to UL-NSF standards upon request

QX OPTIMA

FLIGHT-TYPE DISHWASHERS
WITH 3R+ REINFORCED
TRIPLE RINSE

AWARDED FOR THEIR **HIGH EFFICIENCY:** LOWEST CONSUMPTION LEVELS IN OUR SECTOR

CONNECTIVITY
WHEREVER YOU ARE...YOUR DISHWASHER, JUST A CLICK AWAY

SMART DRIVE+
10 VARIABLE SPEEDS

MULTI PATENTED
SAVING SYSTEMS

	H	pcs/h	DIN	710 mm wide conveyor	W/D/H mm
QX 250	450	1950/3690	2850	710	5500x1110x2070/2200
QX 380	450	2400/4050	3660	710	6100x1110x2070/2200
QX 420	450	3000/4800	4200	710	6400x1110x2070/2200
QX 540	450	4200/6450	5100	710	7000x1110x2070/2200
QX 600	450	4350/6750	5550	710	7300x1110x2070/2200
QX 680	450	5250/8100	6450	710	8300x1110x2070/2200
QX 780	450	5850/9000	6900	710	8600x1110x2070/2200

Productivity according to DIN SPEC 10534 regulation (contact time)
Steam versions available

TX

TUNNEL TRAYWASHER
WITH DRYER

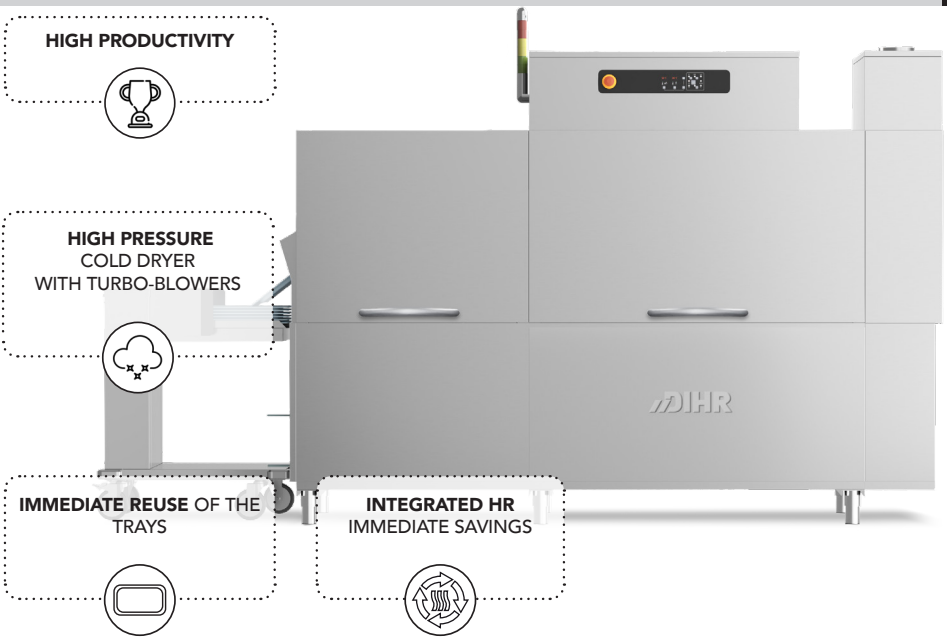

	tray	mm	W/D/H mm
TX 1600	Length max: 587 Width max: 370 Depth max: 35	-	2575x805x2040/2120
PF	Length max: 587 Width max: 370 Depth max: 35	-	800x500x900

TRANSPORTATION SYSTEM

BCC	GN 1/1	-	upon request
SCT	GN 1/1	-	upon request
SCR	-	500x500	upon request
CCC	-	500x500	upon request

LP

CONNECTIVITY
WHEREVER YOU ARE...YOUR DISHWASHER, JUST A CLICK AWAY

PROGRAMMABLE CYCLES

PLUS SYSTEM:
STABILIZED RINSE, GUARANTEED TEMPERATURES, CONSUMPTION AND PRESSURE

	H	Ø	mm	pcs/h	H	tray*	W/D/H mm
LP1 S4	400	400	500x500	53	Euronorm	600x400x25	600x680x850
LP1 S5 PLUS	-	-	500x610	60	440	600x400x25	600x700x1380
LP1 800	-	-	550x665	30	805	600x400x25	650x750x1690/2060
LP1 S8 PLUS[U]	-	-	550x665	30	805	600x400x25	690x800x1890/2270
LP1 S8 HR PLUS[U]	-	-	550x665	13	805	600x400x25	690x800x2165/2270
LP2 S PLUS	-	-	700x700	20	645	600x400x25	840x885x1800/2035
LP2 S HR PLUS	-	-	700x700	15	645	600x400x25	840x885x2140
LP3 S PLUS	-	-	850x725	20	645	600x400x25	990x885x1800/2035
LP3 S HR PLUS	-	-	850x725	15	645	600x400x25	990x885x2140
LP4 S8 PLUS[U]	-	-	1350x725	20	820	600x400x25	1490x885x1970/2295
LP4 S8 HR PLUS[U]	-	-	1350x725	13	820	600x400x25	1490x885x2307

* Max depth 25 mm. U: Construction according to UL-NSF standards upon request

LP

NEW MODEL MAXXI MULTI-USE WITH LARGE 600X500 MM BASKET

CONNECTIVITY
WHEREVER YOU ARE...YOUR DISHWASHER, JUST A CLICK AWAY

PROGRAMMABLE CYCLES

PLUS SYSTEM:
STABILIZED RINSE, GUARANTEED TEMPERATURES, CONSUMPTION AND PRESSURE

	mm	mm	pcs/h	mm	tray*	W/D/H mm
LP1 MAXXI PLUS	500x600	500x600	72	500x600	600x400x25	800x735x1490/1961
LP1 MAXXI HR PLUS	500x600	500x600	55	500x600	600x400x25	800x735x2162
LP1 MAXXI PLUS LIFT	500x600	500x600	72	500x600	600x400x25	800x735x1490/1961
LP1 MAXXI HR PLUS LIFT	500x600	500x600	55	500x600	600x400x25	800x735x2162

* Max depth 25 mm.

HYDROPOWER

COMBI
HIGH-PRESSURE
UTENSIL AND
DISHWASHER

COMPACT DIMENSIONS

2 IN 1 TRAY/PAN WASHER AND DISHWASHER

"SPINNING" FUNCTION

HIGH-PRESSURE WATER JETS AGAINST THE MOST STUBBORN DIRT

	pcs/h *		tray* 600x400x25	tray* 530x325x25	W/D/H mm
	piatti	vassoi	pz	pz	
HYDROPOWER	51	20	2	4	830x940x1720/2200H
HYDROPOWER HR	26	18	2	4	830x940x1720/2200H
HYDROPOWER LIFT	51	20	2	4	830x940x2277H
HYDROPOWER HR LIFT	26	18	2	4	830x940x2277H

* Useful height: 55 mm

GRANULES

GRANULE
WAREWASHERS

MULTI PATENTED

WITH THE **GRANULES**
SOAKING IS NO
LONGER NECESSARY

SIGNIFICANTLY
REDUCES WORKING TIME

LESS WATER AND ENERGY
CONSUMPTION

	GN 1/1 pcs	GN 2/1 pcs	Ø	H	W/D/H mm
GRANULES 900 PLUS	6	2	735	635	1095x910x1910/2020
GRANULES 900 HR PLUS	6	2	735	635	1095x910x2100
GRANULES 1000 HR PLUS	8	4	850	830	1200x1010x2260/2305

VX

PULL-THROUGH CRATE
WASHERS

POWERFUL WASH SOLUTIONS FOR BAKERIES, PASTRIES AND FOOD INDUSTRY

ONE-PERSON LOADING SYSTEM (SPECIAL VERSIONS)

LOW RUNNING **COSTS**

	pcs/h *	W/D/H mm	W/D/H mm	W/D/H mm
VX 231	200	510x600x500	-	2600x805x1830/2120
VX 231 SPECIAL	200	510x600x500	-	2710x805x2075/2120
VX 281	200	510x600x800	-	2800x805x2130/2720
VX 301	260	510x600x500	-	4100x805x1830/2120
VX 301 SPECIAL	260	510x600x500	-	4210x805x2075/2120
VX 401	400	510x600x500	-	4100x805x1830/2120
VX 401 SPECIAL	400	510x600x500	-	4210x805x2075/2120
VX 251	200	510x600x500	510x600x500	3200x805x1830/2120
VX 351	260	510x600x500	510x600x500	4700x805x1830/2120

Steam version available for models: VX 231 - VX 301 - VX 401 VX 231VX 301VX 401
* For detailed information about rack / type rack capacity, please contact the manufacturer

LX

CONVEYOR
CRATE WASHERS

CONNECTIVITY
WHEREVER YOU ARE...YOUR DISHWASHER,
JUST A CLICK AWAY

HEAVY WORKLOADS

	pcs/h **		W/D/H mm	W/D/H mm
	min	max		
LX 501 *	235	368	640x600x450	4900x985x1860/2200
LX 751 *	346	543	640x600x450	5800x985x1860/2200
LX 1001 *	474	741	640x600x450	6700x985x1860/2200
LX 1251 *	562	878	640x600x450	7600x985x1860/2200
LX 851 HD *	149	229	640x600x450	6200x985x1860/2200
LX 1101 HD *	208	320	640x600x450	7500x985x1860/2200

* All models are available with steam version
** For detailed information about rack / type rack capacity, please contact the manufacturer

BASKETS INCLUDED

GLASSWASHERS	2 x glass baskets, 1 x saucer holder, 1 x cutlery holders
DISHWASHERS	1 x dish basket, 1 x glass basket, 1 x cutlery holder (ELECTRON 1000 + 1 C43)
MAXXI HOOD-TYPE DISHWASHERS	2 x dish baskets, 1 x glass basket, 2 x cutlery holders
MAXXI HOOD-TYPE DISHWASHERS	1 x dish basket, 1 large mesh basket, 1 trays basket, 2 x cutlery holders
RACK-TYPE DISHWASHERS	1 x dish basket, 1 x glass basket, 1 x cutlery basket (8 places), 1 x tray basket
WAREWASHERS	LP1 S4: 1 x S/S trays support, 1 x large mesh plastic basket, 1 x spatula holder (LP1 S4 + 1 S/S griddle)
	LP1 S5 PLUS: 1 x S/S griddles basket holder, 1 x S/S basket, 1 x trays support, 1 x S/S spatula holder
	LP1 MAXXI PLUS: 1 x dish basket, 1 large mesh basket, 1 trays basket, 1 x S/S spatula holder
	LP1 800 - LP1 S8 PLUS: 1 x S/S basket, 1 x S/S griddle, 1 x trays support, 1 x S/S spatula holder
	LP2 S PLUS - LP3 S PLUS - LP4 S8 PLUS: 1 x S/S basket, 1 x S/S trays support, 1 x S/S spatula holder

TERMS

DELIVERY	20 days for semi-automatic machines - 50 days for automatic machines
PACKING	Cardboard box (included in the price). The wooden cage's price is the equivalent of the 2% of the machine's net price -minimum amount charged is € 90 (on the following models: RX, QX, TX, TS, VX,LX, LX-HD, TC, RTC,LC 77/2, LC 77/3,LC 96, LC 97, LC 97/2, LC 97/3, A 20, A 10).
SPARE PARTS	For orders lower than € 50 net, a 5€, fee will be applied as management costs.
TERMS	Ex-works (Castelfranco Veneto).
WARRANTY ON OUR PARTS	24 months from invoice date, subject to our Service verification of the problem causes.
TRANSPORT	The supply is carried out Ex works DIHR ALI GROUP Srl ,Contracts stipulated with DIHR ALI GROUP Srl. The goods travel at the purchaser's sole risk even when the carrier has been chosen and instructed by DIHR ALI GROUP Srl on behalf of the purchasing party.
OWNERSHIP RESERVATION	The goods are the exclusive property of DIHR ALI GROUP Srl until the invoice is paid in full.
COURT OF JURISDICTION	Contracts stipulated with DIHR ALI GROUP Srl are subject to Italian law. For any dispute that may arise from contracts with DIHR ALI GROUP Srl- including abroad contracts - the court of jurisdiction shall be that of Treviso.
USER MANUALS	User manuals are originally issued in a main EU language. When a machine is put into service, it must be provided with an appropriate translation of the original manual in the language(s) used in the country where the appliance is installed, along with its original instructions. This translation into the language or languages of the country of use, must be carried out at the care and responsibility of the person introducing the machine into the relevant linguistic area. In case of tunnel machines, any costs for the supervision of our technician during the installation and on-site testing phases will be quoted separately.

DIHR
we mean clean

DIHR
we mean clean

DIHR ALI GROUP SRL
Via del Lavoro, 28
31033 Castelfranco Veneto (TV)

T: +39 0423 7344
E: dihr@dihr.com

Service:
T. +39 0423 734548
E: service@dihr.com

www.dihr.com

Edition 09.2026

an Ali Group Company

GROUP

the spirit of excellence