


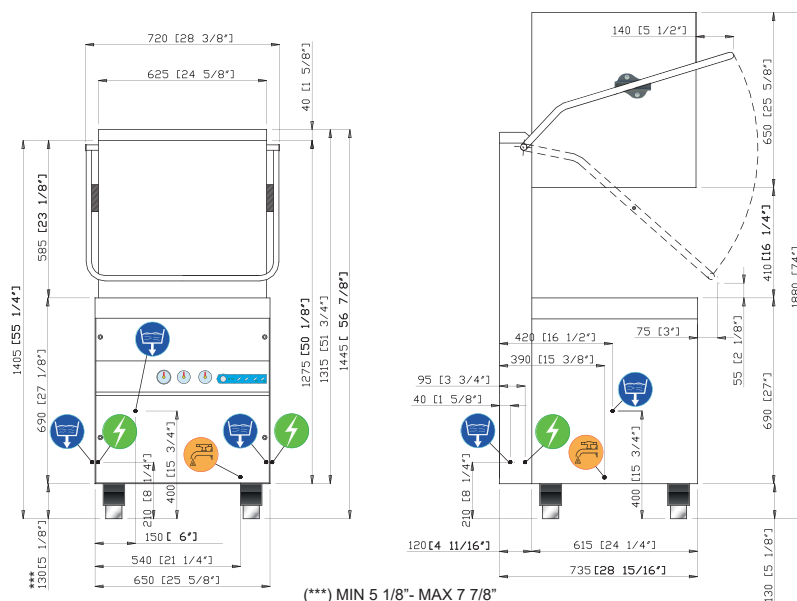

	ENTRATA ACQUA 3/4" GAS
	SCARICO ACQUA Ø24mm
	ALLACCIAMENTO ELETTRICO

TECHNICAL DATA			
EXTERNAL DIMENSIONS			
width	(inch)	28 3/8"	
depth	(inch)	28 15/16"	
height	(inch)	56 7/8" - 74" (open hood)	
WEIGHT	(lbs)	231	
VOLTAGE		220/240V 1ph 60 Hz	
POWER REQUIRED		10920 W	
WATER HARDNESS		2 - 8 °F	
INLET WATER PRESSURE (170 - 620 kPa)		25 - 90 PSI	
CROCKERY DIMENSIONS			
plates diameter	(inch)	16 1/4"	
trays max. dimension	(inch)	GASTRONORM 1/1	
RACK DIMENSION	(inch)	20" x 20"	
RACK EQUIPMENT		2XC40 - 1XC44 - 2X15060	
WASHING CYCLES	(sec)	1 (120)	2 (180)
WATER SUPPLY 131°F			
racks/h(*) ⁽¹⁾		30	20
WATER SUPPLY 50°F			
racks/h(*) ⁽¹⁾		30	20
WATER CONSUMPTION / CYCLE (rinse pressure 17 Psi)	[gal(US)]	0,79	
BOOSTER CAPACITY	[gal(US)]	2,66	
BOOSTER HEATING ELEMENT		9800 W	
RINSING TEMPERATURE (SET)		185°F	
TANK CAPACITY	[gal(US)]	7,93	
TANK HEATING ELEMENT		2940 W	
TANK TEMPERATURE (SET)		160°F	
PUMP POWER		1120 W (166 gal(US)/min***)	
DRAIN PUMP		43W hMAX 31 1/2"(10,78 gal(US)/min***)	
NOISE		63,6±0.7 dB(A)	

(***) MAXIMUM FLOW RATE

(1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

