

### Range: HT 12 MAXXI

We introduce the new versatile hood-type dishwasher, an innovative product designed to simplify the washing of objects of different sizes in an easy-to-use and efficient way. Equipped with a large basket of 600x500 mm, these machines can accommodate plates, glasses, pans and other objects of different sizes, ensuring impeccable results. Thanks to customizable washing programs, 2 HYGIENE+ cycles and an advanced technology, this model guarantees perfect results in a short time, saving energy and water. A robust and resistant structure allows to last over time and offers high performance even after numerous uses. Whether you need to wash dishes in a restaurant, a bar or a canteen, the pass-through multifunction dishwasher is the ideal choice to ensure a more efficient management of your time.



### FEATURES

- Rack 600x500 mm
- Useful height 450 mm
- 6 wash cycles: 4 customizable cycles + 2 HYGIENE+ cycles
- Easy and intuitive electronic control panel
- Double skin insulated hood
- Deep tank
- Double tank filters with dirt collection system and pump filter (improved system for a better filtration of the wash water)
- Self-cleaning vertical wash pump for greater operating hygiene
- Water consumption and working time control system
- Easy to access for maintenance
- Non-drip roof panel
- Easily removable basket support
- Linear or corner layouts
- Self-cleaning cycle
- Peristaltic detergent and rinse aid dispensers included with dosage adjustable from the control panel
- The PLUS System ensures optimal and constant rinsing performance thanks to the combination of Break Tank, atmospheric boiler and rinse pump

### OPTIONS

- Special voltages
- Drain pump
- Built-in peristaltic detergent dispenser
- Peristaltic rinse aid dispenser
- Built-in water softener with automatic regeneration
- Predisposition for connection to an external reverse osmosis system
- Additional boiler power for cold water supply
- WRAS Break Tank
- DVGW Break Tank
- Connectivity (Cloud)
- Probes for lack of detergent and rinse aid detection
- Substitute remote control panel

Option compatibility to be confirmed by the manufacturer after verification

**CAPACITY**





Ø 310    600x500

**RACK EQUIPMENT**

- 1X C136
- 1 X C137
- 1 X C138
- 2 X 15060



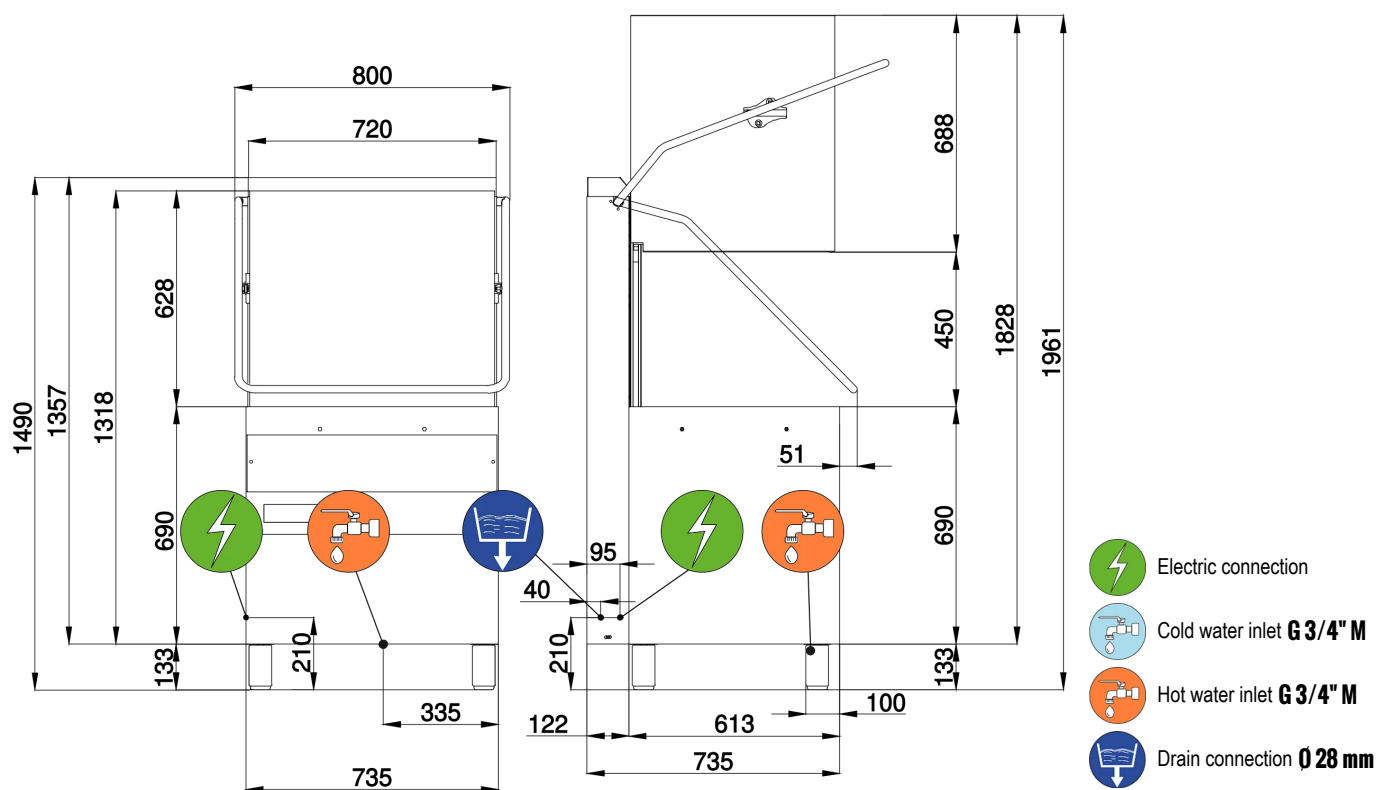

### TECHNICAL FEATURES

#### EXTERNAL DIMENSIONS

|                           |    |                         |
|---------------------------|----|-------------------------|
| Width                     | mm | 800                     |
| Depth                     | mm | 735                     |
| Height (screwed foot)     | mm | 1490 / 1961 (open hood) |
| Weight (standard version) | kg | 120                     |

#### TECHNICAL DATA

|                                  |       |           |
|----------------------------------|-------|-----------|
| Basket dimensions                | mm    | 600x500   |
| Maximum dish diameter            | mm    | 310       |
| Maximum level of water discharge | mm    | 170       |
| Water inlet temperature          | °C    | 55        |
| Maximum inlet water hardness     | °f    | 8         |
| Inlet water pressure             | kPa   | 200 - 400 |
| Tank capacity                    | l     | 42        |
| Tank heating element             | kW    | 2.7       |
| Boiler capacity                  | l     | 15        |
| Boiler heating element           | kW    | 9         |
| Wash pump power                  | kW    | 1.49      |
| Wash pump flow rate              | l/min | 800       |
| Rinse pump power                 | kW    | 0.25      |
| Sound pressure level             | dB(A) | 72.5      |

### LOADING CAPACITY

|                         |  |                   |
|-------------------------|--|-------------------|
| GN 1/1 loading capacity |  | 10 x (530x325x25) |
|-------------------------|--|-------------------|

### POWER SUPPLY DATA

|                       |    |                    |
|-----------------------|----|--------------------|
| Supply voltage        |    | 380-415 V 3N 50 Hz |
| Total installed power | kW | 10.49              |

| CYCLES                                          |    |     |     |     |     |     |     |
|-------------------------------------------------|----|-----|-----|-----|-----|-----|-----|
| Cycle number                                    |    | 1   | 2   | 3   | 4   | 5   | 6   |
| Cycle length                                    | s  | 50  | 90  | 120 | 180 | 180 | 630 |
| Cycle productivity (racks/h) - 55°C inlet water |    | 72  | 40  | 30  | 20  | 20  | 5   |
| Cycle productivity (racks/h) - 10°C inlet water |    | 35  | 35  | 30  | 20  | 20  | 5   |
| Cycle water consumption                         | l  | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 |
| Rinsing temperature setting                     | °C | 85  | 85  | 85  | 85  | 90  | 90  |
| Washing temperature setting                     | °C | 55  | 55  | 55  | 55  | 55  | 55  |

Standard Thermostop. In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.