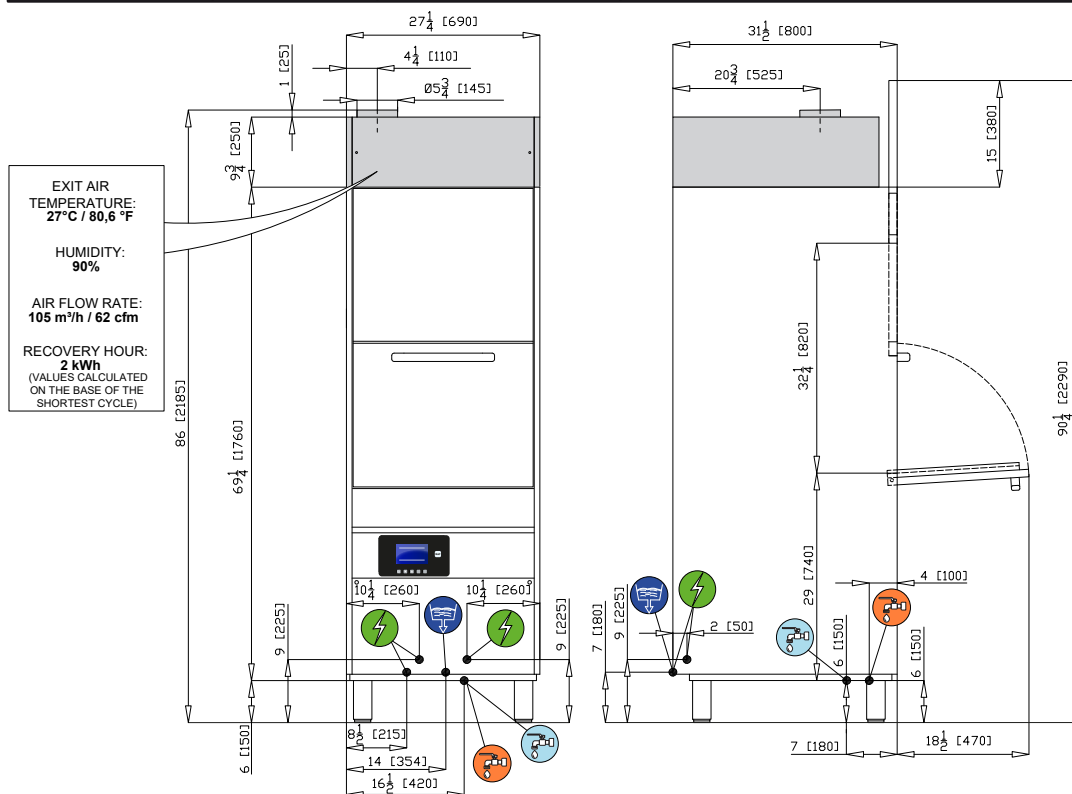


	WATER CONNECTION 3/4" GAS 131 °F (55 °C)
	WATER CONNECTION 3/4" GAS 50 °F (10 °C)
	DRAINING PIPE 1" 1/4 - 1" 5/8 (Ø 32 mm - Ø 40 mm)
	ELECTRICAL SUPPLY

TECHNICAL DATA					
EXTERNAL DIMENSIONS					
WIDTH	27 ¼ inch (690 mm)				
DEPTH	31 ½ inch (800 mm)				
HEIGHT	86 / 90 ¼ inch (2185/2290 mm porta aperta)				
WEIGHT	364 lb (165 kg)				
VOLTAGE	(V)	208 3 ph 60 Hz	220-240 3 ph 60 Hz	480 3 ph 60 Hz	
POWER REQUIRED	13050 W		13580 W	13050 W	
WATER HARDNESS	< 8 °f				
WATER CONDUCTIVITY	> 200 µS/cm				
INLET WATER PRESSURE	25 - 90 PSI (170 - 600 kPa)				
USEFUL HEIGHT AND RACKS					
USEFUL HEIGHT	31 ¾ inch (805 mm)				
RACK DIMENSIONS	21 ¾ x 26 ¼ inch (550 x 665 mm)				
RACK EQUIPMENT		1XC86/A - 1XC87/B - 1XC97/A - 1XC100			
WASHING CYCLES	(min)	1 (5,5)	2 (6,5)	3 (8,5)	4 (10,5)
WATER SUPPLY 50-60 °F					
RACKS/h (*) (1)	10		9	7	5
WATER CONSUMPTION / CYCLE		1,1 US gal lqd (4 l)			
BOILER CAPACITY		4 US gal lqd (15 l)			
BOILER HEATING ELEMENT		6000 W			
RINSING TEMPERATURE (SET)		185 °F (85 °C)			
TANK CAPACITY		13,2 US gal lqd (50 l)			
TANK HEATING ELEMENT		5000 W			
TANK TEMPERATURE (SET)		165 °F (74 °C)			
WASHING PUMP POWER		2000 W			
RINSING PUMP POWER		250 W			
DRAIN PUMP (OPTIONAL)		30 W			
ACOUSTIC PRESSURE		(70 ± 2,5) dB(A)			

(*) STANDARD THERMOSTOP (CAN NOT BE DISABLED)

(1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.