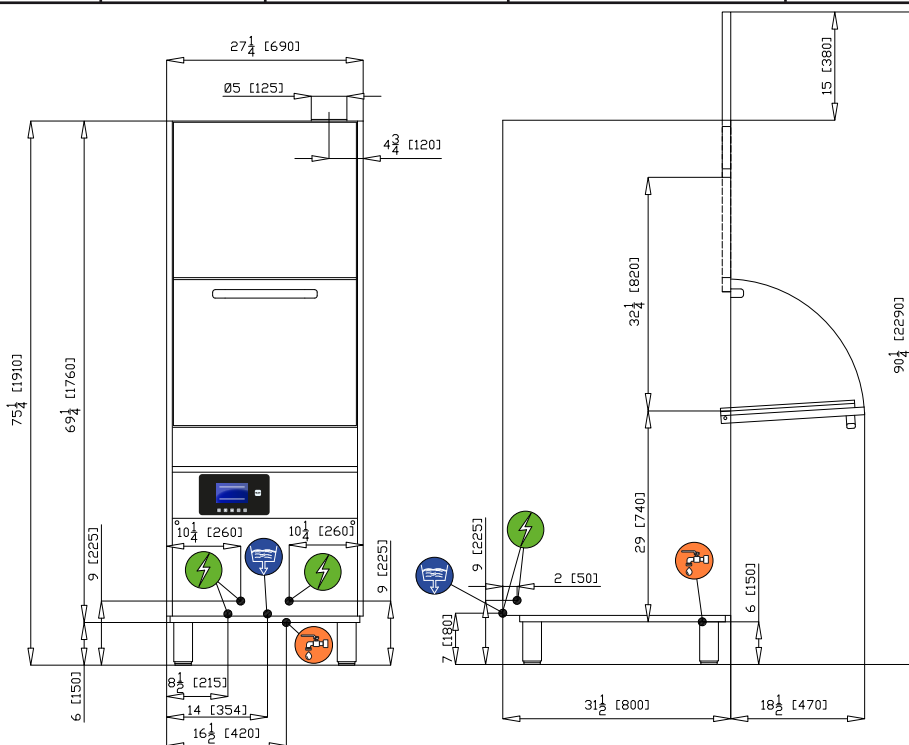


	WATER CONNECTION 3/4" GAS 131 °F (55 °C)
	DRAINING PIPE 1" 1/4 - 1" 5/8 (Ø 32 mm - Ø 40 mm)
	ELECTRICAL SUPPLY

TECHNICAL DATA				
EXTERNAL DIMENSIONS				
WIDTH	27 ¼ inch (690 mm)			
DEPTH	31 ½ inch (800 mm)			
HEIGHT	75 ¼ / 90 ¼ inch (1910/2290 mm porta aperta)			
WEIGHT	342 lb (155 kg)			
VOLTAGE (V)	208 3 ph 60 Hz	220-240 3 ph 60 Hz	480 3 ph 60 Hz	
POWER REQUIRED	13000 W	13530 W	13000 W	
WATER HARDNESS	< 8 °f			
INLET WATER PRESSURE	25 - 90 PSI (170 - 600 kPa)			
USEFUL HEIGHT AND RACKS				
USEFUL HEIGHT	31 ¾ inch (805 mm)			
RACK DIMENSIONS	21 ¾ x 26 ¼ inch (550 x 665 mm)			
RACK EQUIPMENT	1XC86/A - 1XC87/B - 1XC97/A - 1XC100			
WASHING CYCLES (min)	1 (5)	2 (6)	3 (8)	4 (10)
WATER SUPPLY 40-150 °F				
RACKS/h (*) (1)	12	10	7	6
WATER CONSUMPTION / CYCLE	1,1 US gal lqd (4 l)			
BOILER CAPACITY	4 US gal lqd (15 l)			
BOILER HEATING ELEMENT	6000 W			
RINSING TEMPERATURE (SET)	185 °F (85 °C)			
TANK CAPACITY	13,2 US gal lqd (50 l)			
TANK HEATING ELEMENT	5000 W			
TANK TEMPERATURE (SET)	165 °F (74 °C)			
WASHING PUMP POWER	2000 W			
RINSING PUMP POWER	250 W			
DRAIN PUMP (OPTIONAL)	30 W			
ACOUSTIC PRESSURE	(70 ± 2,5) dB(A)			

(*) STANDARD THERMOSTOP (CAN NOT BE DISABLED)

(¹) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.