
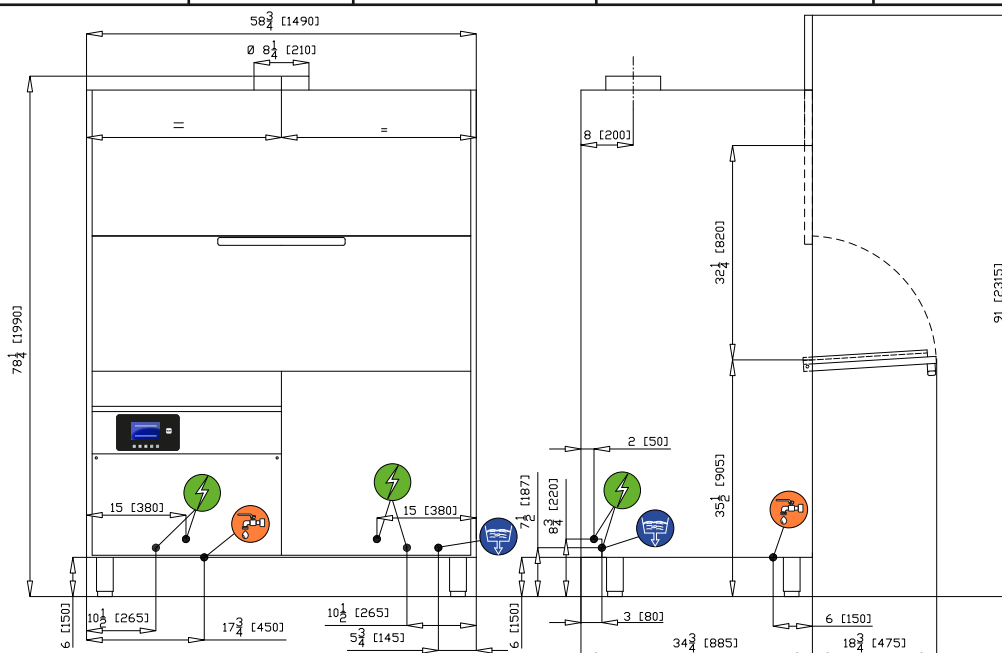


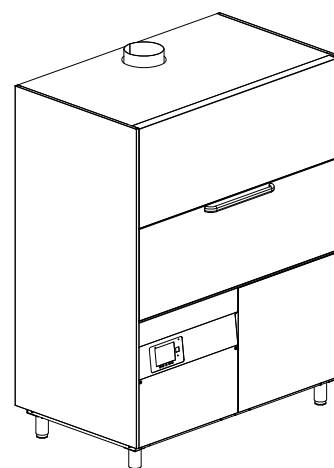

	WATER CONNECTION 3/4" GAS 131 °F (55 °C)
	DRAINING PIPE 1" 1/4 - 1" 5/8 (Ø 32 mm - Ø 40 mm)
	ELECTRICAL SUPPLY

TECHNICAL DATA				
EXTERNAL DIMENSIONS				
WIDTH	58 ¾ inch (1490 mm)			
DEPTH	34 ¾ inch (885 mm)			
HEIGHT	78 ¼ / 91 ¼ inch (1990/2315 mm porta aperta)			
WEIGHT	750 lb (340 kg)			
VOLTAGE (V)	208 3 ph 60 Hz	220-240 3 ph 60 Hz	480 3 ph 60 Hz	
POWER REQUIRED	23200 W	24800 W	23200 W	
WATER HARDNESS	< 8 °f			
INLET WATER PRESSURE	25 - 90 PSI (170 - 600 kPa)			
USEFUL HEIGHT AND RACKS				
USEFUL HEIGHT	32 ¼ inch (820 mm)			
RACK DIMENSIONS	53 ¼ x 28 ½ inch (1350 x 725 mm)			
RACK EQUIPMENT	1XC86/A - 1XC97/A - 1X93600			
WASHING CYCLES (min)	1 (8)	2 (10)	3 (12)	4 (14)
WATER SUPPLY 40-150 °F				
RACKS/h (*) (1)	7	6	5	4
WATER CONSUMPTION / CYCLE	2,64 US gal lqd (10 l)			
BOILER CAPACITY	5,3 US gal lqd (20 l)			
BOILER HEATING ELEMENT	9000 W			
RINSING TEMPERATURE (SET)	185 °F (85 °C)			
TANK CAPACITY	38 US gal lqd (144 l)			
TANK HEATING ELEMENT	9000 W			
TANK TEMPERATURE (SET)	160 °F (71 °C)			
WASHING PUMP POWER	2600 W			
RINSING PUMP POWER	250 W			
DRAIN PUMP (OPTIONAL)	30 W			
ACOUSTIC PRESSURE	(74 ± 2,5) dB(A)			

(*) STANDARD TERMOSTOP (CAN NOT BE DISABLED)

(1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.