


**EXIT AIR TEMPERATURE : 77°F**

**HUMIDITY: 60%**

**AIR FLOW RATE: 3700 Ft³/h**

**HEAT RECOVERY PER HOUR: 2,7 kWh**  
(VALUES CALCULATED ON THE BASIS OF THE SHORTEST CYCLE)

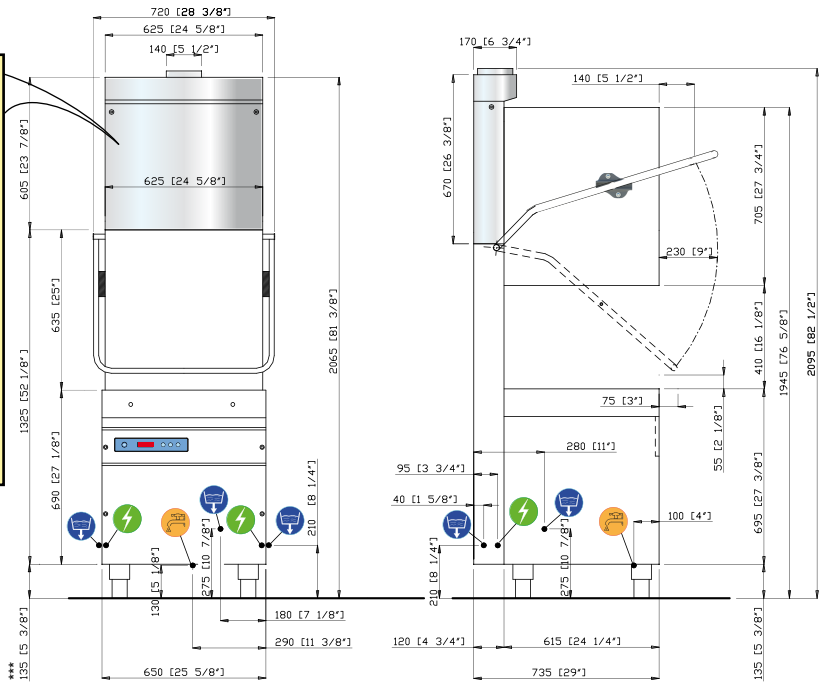

|  |   |
|--|---|
|  | <b>WATER CONNECTION 3/4" G (NO OSMOTIC WATER)</b> |
|  | <b>DRAINING 15/16 inch</b>                        |
|  | <b>ELECTRICAL SUPPLY</b>                          |

(\*\*) MIN 5 3/8" - MAX 7 7/8"

| TECHNICAL DATA                             |           |  |         |         |                 |
|--|-----------|--|---------|---------|-----------------|
| <b>EXTERNAL DIMENSIONS</b>                 |           |  |         |         |                 |
| <b>width</b>                               | (inch)    | 28 3/8"                                  |         |         |                 |
| <b>depth</b>                               | (inch)    | 29"                                      |         |         |                 |
| <b>height</b>                              | (inch)    | 82 1/2"                                  |         |         |                 |
| <b>WEIGHT(basic version)</b>               | (lbs)     | 319,6                                    |         |         |                 |
| <b>VOLTAGE</b>                             |           | 220-240V 3ph 60Hz                        |         |         |                 |
| <b>POWER REQUIRED</b>                      | (W)       | 10750 W                                  |         |         |                 |
| <b>WATER HARDNESS</b>                      |           | 2-8 °F                                   |         |         |                 |
| <b>INLET WATER PRESSURE</b>                |           | 25-90 PSI (170 - 620 ) KPa               |         |         |                 |
| <b>CHINA DIMENSIONS</b>                    |           |  |         |         |                 |
| <b>plates diameter</b>                     | (inch)    | 16 1/8"                                  |         |         |                 |
| <b>trays max. dimension</b>                | (inch)    | GASTRONORM 1/1 (20 7/8"x12 3/4")         |         |         |                 |
| <b>RACK DIMENSION</b>                      | (inch)    | 20"x20"                                  |         |         |                 |
| <b>RACK EQUIPMENT</b>                      |           | 2XC40 - 1XC44 - 2X15060                  |         |         |                 |
| <b>WASHING CYCLES (sec)</b>                | (s)       | 1 (120)                                  | 2 (180) | 3 (240) | 4 (300) 5 (360) |
| <b>WATER SUPPLY 10°C</b>                   |           |  |         |         |                 |
| <b>racks/h(*) (1)</b>                      |           | 30                                       | 20      | 15      | 12 10           |
| <b>WATER CONSUMPTION / CYCLE [gal(US)]</b> |           |  |         |         |                 |
| <b>BOOSTER CAPACITY</b>                    | [gal(US)] | 0,68                                     |         |         |                 |
| <b>BOILER HEATING ELEMENT</b>              |           | 3,96                                     |         |         |                 |
| <b>RINSING TEMPERATURE (SET)</b>           |           | 9000 W                                   |         |         |                 |
| <b>TANK CAPACITY</b>                       | [gal(US)] | 185°F                                    |         |         |                 |
| <b>TANK HEATING ELEMENT</b>                |           | 11,1                                     |         |         |                 |
| <b>TANK TEMPERATURE (SET)</b>              |           | 2700 W                                   |         |         |                 |
| <b>PUMPS POWER washing / rinsing</b>       |           | 160°F                                    |         |         |                 |
| <b>DRAIN PUMP</b>                          |           | 1750W (211 gal(US)/min***)/250 W         |         |         |                 |
|  |           | 43 W h max 31 1/2"(10,78 gal(US)/min***) |         |         |                 |

(\*) STANDARD THERMOSTOP

(\*\*) MAXIMUM FLOW RATE

(1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.