
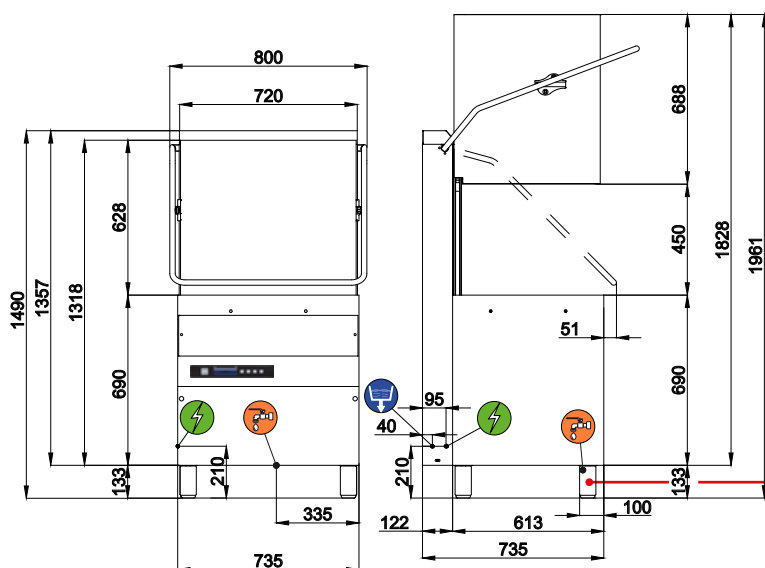


PIEDINO "MARINA"
"MARINA" FOOT

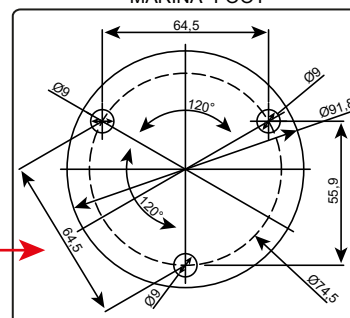

TECHNICAL DATA							
EXTERNAL DIMENSIONS							
width	800 mm						
depth	735 mm						
height	1490/1961 (capotta aperta) mm						
WEIGHT(basic version)	120 kg						
VOLTAGE	400V 3N 50Hz (380/400V 3 60Hz "Marina")						
POWER REQUIRED	10490 W						
WATER HARDNESS	2-8 °f						
INLET WATER PRESSURE	200-400 kPa						
CROCKERY DIMENSIONS							
plates diameter	310 mm (22 pz DWC136); 310 mm (410 mm depth 25 mm (11 pz DWC138)						
trays max. dimension	GASTRONORM 1/1 (530x325)						
RACK DIMENSION	600 x 500 mm						
RACK EQUIPMENT	DWC136 - DWC137 - DWC138 - 2 x 15060						
WASHING CYCLES (s)	1 (50)	2 (90)	3 (120)	4 (180)	5 (180**)	6 (630**)	
WATER SUPPLY 55°C							
racks/h(*) ⁽¹⁾	72	40	30	20	20	5	
WATER SUPPLY 10°C							
racks/h(*) ⁽¹⁾	35	35	30	20	20	5	
WATER CONSUMPTION / CYCLE	2,6 l						
BOILER CAPACITY	15 l						
BOILER HEATING ELEMENT	9000 W						
RINSING TEMPERATURE (SET)	85°C					90°C	
TANK CAPACITY	42 l						
TANK HEATING ELEMENT	2700 W						
TANK TEMPERATURE (SET)	55°C						
PUMPS POWER	1490 W (800 l/min ***)						
DRAIN PUMP (optional)	25 W (40 l /min***)						
NOISE	66,4±0,7 dB(A)						

(*) STANDARD TERMOSTOP () WITH 70°C IN TANK (***) MAXIMUM FLOW RATE**

(¹) In caso di alimentazione con acqua fredda e/o in caso di più lavaggi consecutivi si potrebbero allungare i tempi di riscaldamento dell'acqua del risciacquo finale fino al raggiungimento della temperatura ottimale. Conseguentemente, il tempo totale del ciclo di lavaggio potrebbe aumentare.